
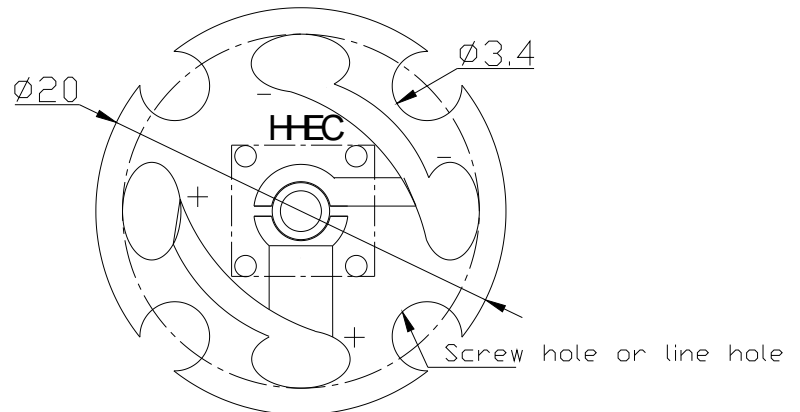


Hochleistungs-LED 3W

Best.Nr. N0700

Part No: HUW-02

Lighting color? White

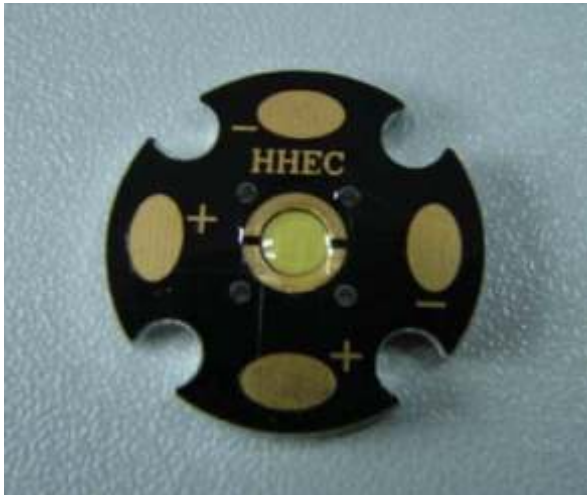

Absolute Maximum Ratings

(Ta=25°C)

Series	Symbol	TestingCondition	Characteristics			Unit
			Min	Typ	Max	
Power Dissipation	Pd	IF = 600mA	—	3	—	W
Reverse Voltage	VR	IR = 50 μ A	—	5	—	V
Peak Forward Current	Ipeak	Duty=0.1, 1kHz	—	1000	—	mA
Operating Temperature Range	Topr	—	-25	25	+60	°C
Storage Temperature Range	Tstr	—	-40	25	+100	°C
Lead Soldering Temperature	Tsol	—	—	260	—	°C

Electro-Optical Characteristics

(Ta = 25°C)

Series	Symbol	TestingCondition	Characteristics			Unit
			Min	Typ	Max	
Forward Voltage	VF	IF = 600mA	3.5	3.8	4.0	V
Reverse Current	IR	VR = 5 V	—	—	50	μ A
Colour temperature	Tc	IF = 600mA	5700	6000	8000	K
Luminous Flux	Φ	IF = 600mA	50	60	—	lm

- Remarks:
1. Luminous Intensity is measured by JF- II tester of HongJin
 2. All of the products are sensitive to static voltage. It is recommended that antistatic facilities like wrist band or antistatic gloves are used when handing the products.
 3. Need to add to spread a hot machine while installing power LED