


VISIBLE LIGHT PRODUCTS

(Super White Light Emitting Diode)

REV:B
DATE:2001/12/26

ESD Products ! Class I


DEVICE NO:HB5-439AWCA



LENS COLOR:

colored diffusion	colored transparent	white diffusion	√	water clear
-------------------	---------------------	-----------------	---	-------------

PACKAGE DIMENSIONS:

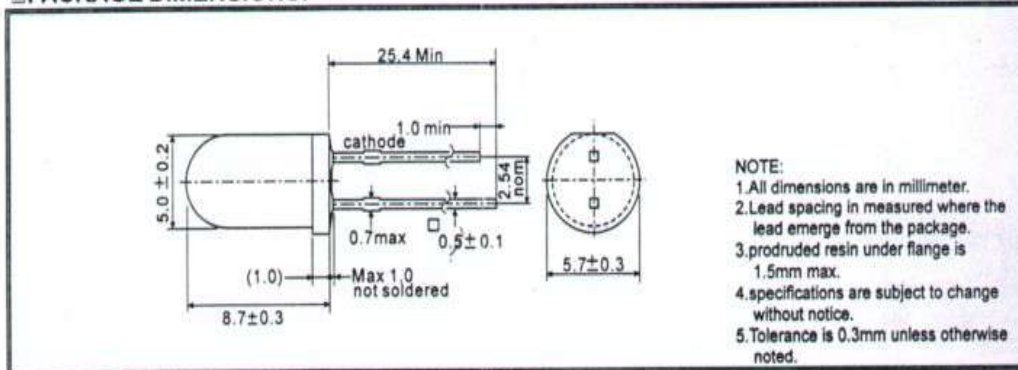

ABSOLUTE MAXIMUM RATINGS:

TA=25°C

PARAMETER	SYMBOL	MAX. RATING	UNIT
Power Dissipation	Pd	120	mW
Continuous Forward Current	IF	25	mA
Peak Forward Current *1	IFM	100	mA
Reverse Voltage	VR	5	V
LED Junction Temperature	Tj	100	°C
Operating Temperature	Topr	-25 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C

Lead Soldering Temperature (1.6mm from case Bottom 260 °C for 5 seconds)

ELECTRIC-OPTICAL CHARACTERISTICS:

TA=25°C

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
View Angle of Half Power	2θ1/2	IF=20mA		22		Degree
Forward Voltage	VF	IF=20mA		3.5	4.1	V
Reverse Current	IR	VR=4V			60	uA
Luminous Intensity *2	IV	IF=20mA	5500	10000		mcd
Chromaticity Coordinates (Bin Sorting)	x	IF=20mA		0.30		
	y	IF=20mA		0.31		
Dominate Wave Length *3	λd(HUE)	IF=20mA		---		nm
Spectrum Width of Half Valve	Δλ	IF=20mA		---		nm

*1. Duty Ratio=1/10, Pulse Width=0.1ms.

*2. Tolerance:30% measuring equipment : EXELTRON 2001.

*3. The dominate wavelength is derived from the CIE Chromaticity Diagram and represents the color of the device.

管制文
禁止複